



HOW TO ORDER

DESCRIPTION: LED Replacement Lamp, 48", 4100K
ORDER CODE #: FLZ-T12-48

STANDARD FEATURES

- 48" length
- 4100K White LEDs
- 115VAC Operating Voltage
- Milk White Lens
- R17D end cap
- Direct replacement anywhere T12 fluorescent is used (replaces NSN: 6210-00-474-5653)

NOTES & PATENT INFORMATION

US Patent #7,307,391 8,115,411 8,791,650 9,179,513
Canada Patent #2,651,224 2,255,065 2,831,641
International Patents Pending
For complete and up to date patent information see our website

*Starter removed as, per MIL-DTL-16377/86A(SH)

DESCRIPTION

The LED lighting tube has been designed to work with conventional MIL-DTL-16377 fluorescent fixtures in order to replace the short lived fluorescent lamps and ballasts that are typically used in interior lighting. The LED tube works without a ballast. This lamp is suitable for use in all MIL-DTL-16377/13 fixtures.

SPECIFICATIONS

- MIL-DTL-16377J tested and compliant
- Operating Temperature: 77°F (25°C), Range -22°F (-30°C) to 130°F (60°C)
- Power Factor: 0.99
- L80 60,000 Hours (based on TM21)
- Minimum 80 CRI, Typical 85 CRI (based on LM80 and ANSI 78.377-2008)
- Uniform color (based on LM80 and ANSI 78.377-2008)
- MIL-STD-461 Compliant (Navy RE101, RE102, CE101, CE102)
- Anti-Vibration compliant (MIL-STD-167-1A)
- V0 Rated Plastics (Smoke and Toxicity tested)


FEATURES

- Solid state lighting device, works well in harsh environments of hot or cold temperatures
- Instant on, no warm up time required
- Lasts 5 times longer than fluorescent
- The extrusion acts as a heat sink to extend life of the LEDs
- Low EMI emissions - Meets the NAVSEA lighting standard for "Exposed Below Deck" Electro magnetic interference
- Designed to replace conventional fluorescent lamps
- Lead and mercury free

ELECTRICAL STATS & OPERATING FUNCTIONS

TYPE	Nominal Length (inch)	Lens Type	TYPE	Input Voltage (AC Volts)			Input Current (Amp)			Luminous Intensity	Power Consumption	CRI
				MIN	TYP	MAX	MIN	TYP	MAX	4100K	TYP	TYP
FLZ	48	CLEAR	0-G	100	115	127	0.04	0.09	0.10	3244	20	85

DIMENSIONS

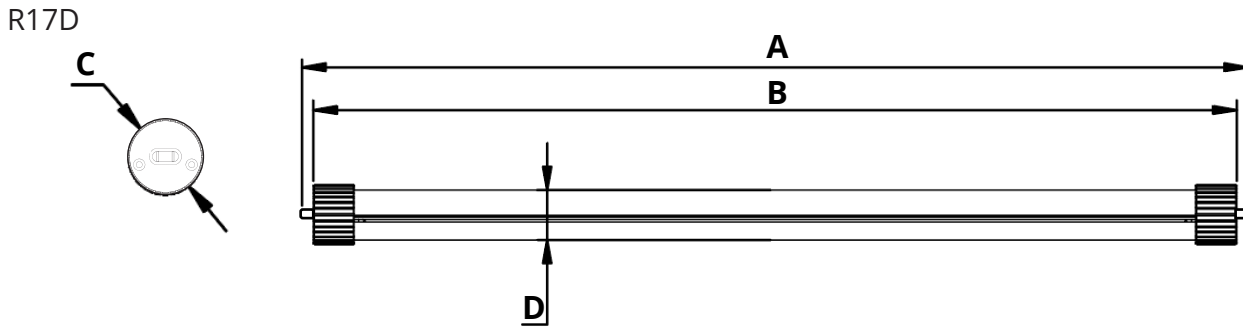

Nominal length	A (pin to pin)		B (end to end)		C (end cap dia)		D (Lamp body dia)	
	INCH	MM	INCH	MM	INCH	MM	INCH	MM
48"	45.78	1163	45.19	1148	1.49	38	1.25	32

ORDERING INFORMATION

