


## MLF SERIES-24V



### STANDARD FEATURES

- Cool White LEDs
- 24V Operating Voltage
- Junction End Cap
- Milk White Lens
- Flush mount
- Mounting Brackets
- On/Off Switch

### DIMENSIONS

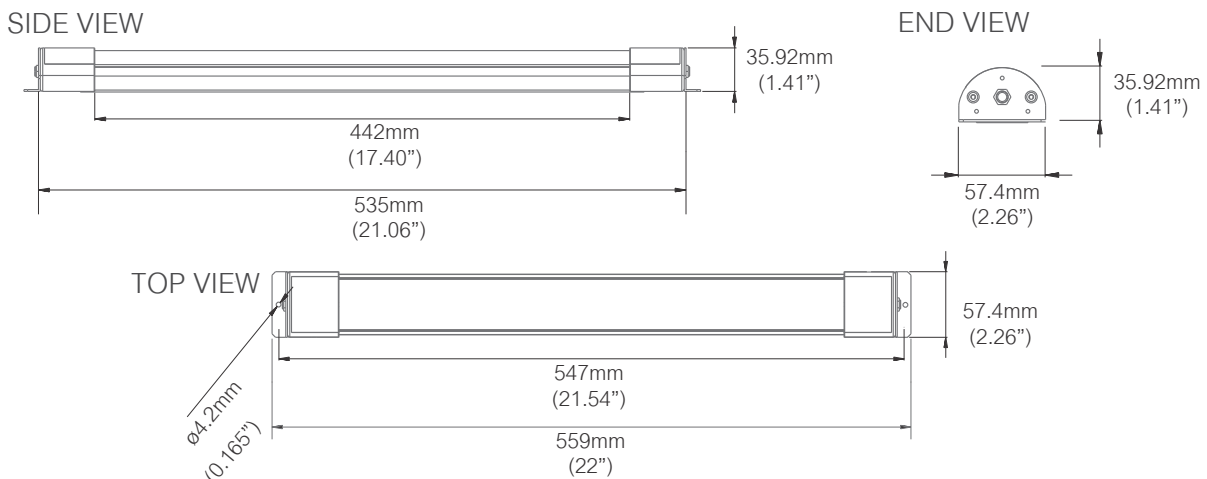

### DESCRIPTION

The LED MLF under cabinet mount light is designed as ultra bright task/desk light.

These lights offer immense illumination in a small package. Linkable for up to 6 lamps in a series, they act as the lamp and fixture in one. Each light can be individually switched on or off, even when connected in series.

### FEATURES


- Solid state lighting device, works well in harsh environments of hot or cold temperatures
- Instant on, no warm up time required
- Lasts 10 times longer than fluorescent
- NO EMI emissions, to eliminate radio interference
- Designed to replace mini light fixtures
- Vibration proof features
- Lead Free Compliant, Mercury Free
- L80 @ 50,000 Hours
- MIL-STD-461 Compliant

## ELECTRICAL STATS & OPERATING FUNCTIONS

Type	Nominal Length (inch)	Lens Type	PART # CODE	Input Voltage (DCVolts)			Input Current (Amp)			Luminous Intensity (Lumens)				Power Consumption	CRI
				MIN	TYP	MAX	MIN	TYP <sup>#</sup>	MAX	COOL	WARM WHITE			TYP	
										5000K	4100K	3500K	2800K		
MLF	22	CLEAR	0-A	22	26.6	28	0.61	0.64	0.77	2105	2024	1970	1752	17	85
		SINGLE FROSTED					0.61	0.64	0.77	1904	1830	1781	1584	17	
		MILK WHITE					0.61	0.64	0.77	1568	1507	1467	1305	17	

Operating Temperature: - 30°C(-22°F) to 50°C (122°F)  
 Typical Color Temperature: 5000K


## ORDERING INFORMATION

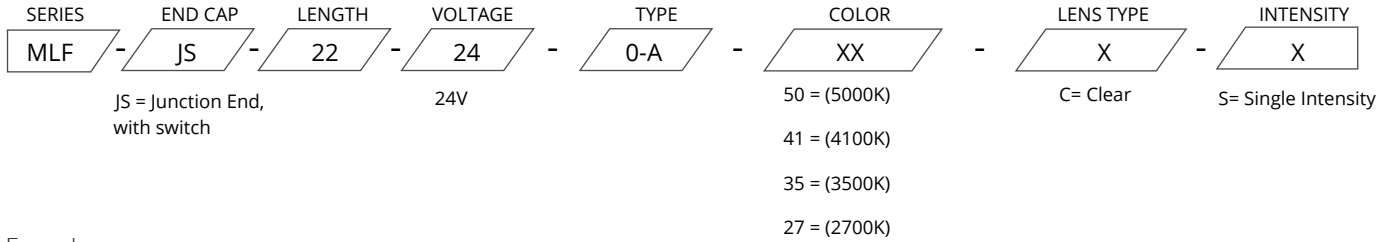

Example:

MLF-JS-22-24-0-A-50-C-S = Mini Light, F Type, Junction End Caps with switch, 22", 24V, 5000K Cool White, Clear lens, Single Intensity

## WHITE COLORS

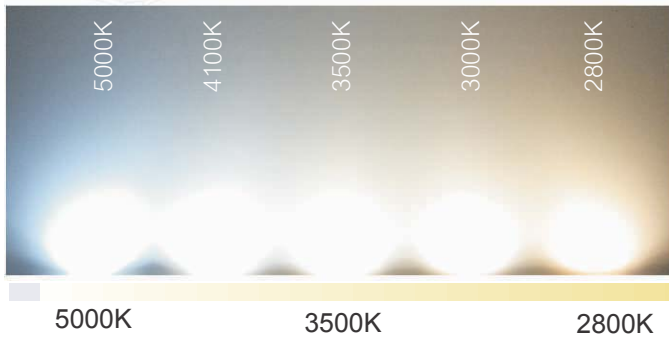

## ACCESSORIES

CONNECTOR WIRES:  
 1", 6", 12", 18"



1"  
 6"  
 12"  
 18"  
 LEAD (48")



## WARNINGS & SAFETY

High power LEDs have a high intensity of light in a single point. Avoid looking directly at the source of the light for any prolonged time as it could cause retinal damage. This light source should be shielded with the a lens as provided by LED Smart Inc. The removal of the lens would void all warranties and liability from the manufacturer and distributor of this product.